



Please note: German is the original language of this document. In case of any conflict with the English translation, the German version will prevail and therefore be the binding one.

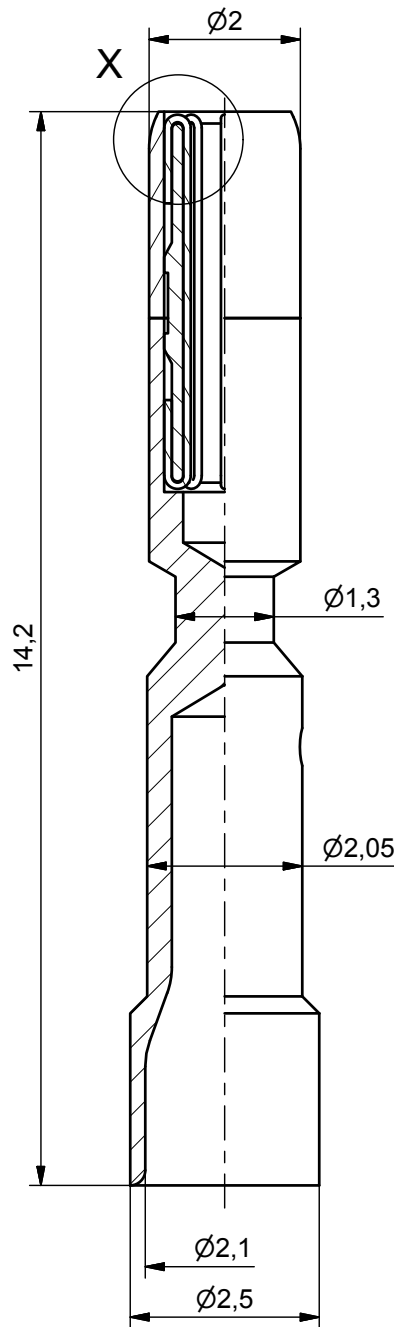

X (20 : 1)



Oberfläche:
Surface:

△ = fl. Cu Ni2 Au0,2
Tol: +100/-0%
passiviert

△ = Schichtdickenmesspunkt
coating thickness point

fine Toleranzen verwendet
/fine tolerances applied

Tabelle/table								
Dimension [mm]	0.5-3	3-6	6-30	30-120	120-400	400-1000	1000-2000	Toler.
f/fine	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	DIN ISO
m/medium	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	2768

technical specification:

scale drawing

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts
/The reproduction, transmission or use of this document or its contents
sind nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu
/is not permitted without express written authority. Offenders will be liable for damages.
Schadenersatz. Alle Rechte im Fall der Patenterteilung oder GM - Eintragung vorbehalten.
/All rights, including rights by patent or registration of utility model or design, are reserved.

All dimensions without unities in mm

Scale
10:1

Drawing-no.
135867

008	4200	19.02.18	Klein	19.02.2018	Ondrej
Index	Change order-no.	Date	Name	Date	Name
		Modified		Approved	
 					
05.08.2014	Apfelbeck				D-style
Date	Name	Date	Name		MZ
Creator		Approved			

Part name Kontaktbuchse 1 mm, Crimpbereich 0,14 - 1,0 mm ² Contact Socket 1 mm, crimping range 0.14 - 1.0 mm ²		
Part number 60.001.11 60-0001-011-000		
Weight 0.184 g Werkstoff Material Messing brass		
P. 1 of 1 Issue date, NZ		

Y7-0273-000-000